

## Encased triangle 1250

*With electric pop up system*



### Advantages:

- Lightweight, easy to mount on the vehicle
- Triangle for use on two lane carriageways
- Corrosionproof aluminium casing
- The electric pop up system provides user comfort and fast set up
- 5 Led warning lights (KR41) which are visible even with the triangle folded
- Screen-printed Class B visible at 500 m

### Technical specifications

- 1250 mm encased triangle with electric pop up system
- Double sided – 74 mm lights O3
- Screen-printed AK5, AK14 or AK31, class B
- Automatic day/night light intensity by a light sensor
- Amber 74 mm LED lights:
  - Photometric characteristics: 600 candelas
  - NF EN12352 classification: L2H, C1+C2, F2+F3, O3, T1
- Casing in untreated aluminium
- Dimensions of the unit, in mm (height x width x depth)
  - Opened triangle: 1243 x 1356 x 1276 mm
  - Folded triangle: 230 x 1356 x 1276 mm

### Available symbols




### Options

- RAL colour to be specified when ordering: Orange DDE (RAL2000), White (RAL9016), Yellow (RAL1016), Red fireman (RAL3000). Please consult us for prices and delivery times. According to RAL standard to be specified.
- Rear warning lights: 5 x 74-mm amber LED lights
  - Warning mode, all the lights flash simultaneously
  - Photometric characteristics: 960 candelas
  - NF EN12352 classification: L2H, C1+C2, F2+F3, O1, T1
- Option of lateral mounting of the two blue or amber Gyroleds.

## Encased triangle 1250

*With electric pop up system*

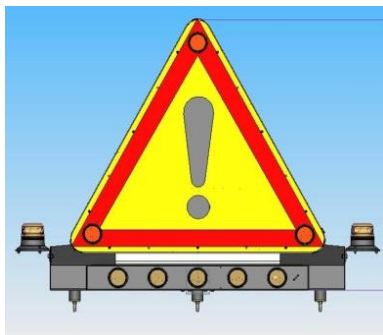

Screen-printed	Warning lights	Casing	Voltage	Item n°
AK14 Class B	-	Painted*	12V	24023
AK5 Class B	-	Painted*	12V	24024
AK14 Class B	-	Painted*	24V	24025
AK5 Class B	-	Painted*	24V	24026
AK14 Class B	warning	Painted*	12V	24027
AK5 Class B	warning	Painted*	12V	24028
AK14 Class B	warning	Painted*	24V	24029
AK5 Class B	warning	Painted*	24V	24030

\* Standard RAL colour

Options	Item n°
2 Blue Gyroleds	30193
2 Amber Gyroleds	30194
Screen-printed AK31	30195

