

BLUE GYROLED

WARRANTY
3 YEARS

Class 1

Blue Gyroled with available mountings



Simple



Magnetic



ISO base



ISO XS base



Pipe-mounted

PRODUCT
++

- LED R65 approved beacon
- Rotating or flashing mode
- Polycarbonate lens
- Comfort of use > sound level = 0 dB
- Possible use with the engine off
- Waterproof product, protected against reverse polarity reversals and insensitive to vibrations
- No more maintenance! No belt, no motor, no expensive flashing light to be replaced

Technical specifications

- Input voltage 10V – 30V
- Operating temperature : -40°C to +85°C
- Consumption:
 - Rotating Gyroled 12V: 960mA
 - Rotating Gyroled 24V: 500mA
 - Flashing Gyroled 12V: 1.16A
 - Flashing Gyroled 24V: 490mA

BLUE GYROLED

Class 1

Approvals

EMC:

DIRECTIVE 2006/28 n°e2*72/245*2006/28*08036
 Complies with CISPR25 (2002) class 3 (rotating mode)

PROTECTION:

Protection against mechanical impacts: IK08 according to NF EN 50102
 Protection index: IP45

PHOTOMETRY: Approval according to regulation R65

Blue (rotating): TB1 (E2) 00 11068

Blue (flashing): TB1 (E2) 00 11069

90 candelas: min value guaranteed on the 0°horizontal plane


200 candelas: max value on the 0°horizontal plane

ELECTRICAL:

ISO 7637-2(2004), Technical specifications PSA B21 7110 (2001) & Renault 36-00-808/___E (2001)

Description	Rotating mode	Flashing mode
Light only	21906	21908
ISO base	21930	21932
ISO XS base	27001	29167
Pipe-mount	21934	21936
Magnetic with cigarette lighter plug	21938	21940
Magnetic with cigarette lighter plug with remote control	30371	30372
Magnetic with jack plug	22275	22276

Mechanical specifications

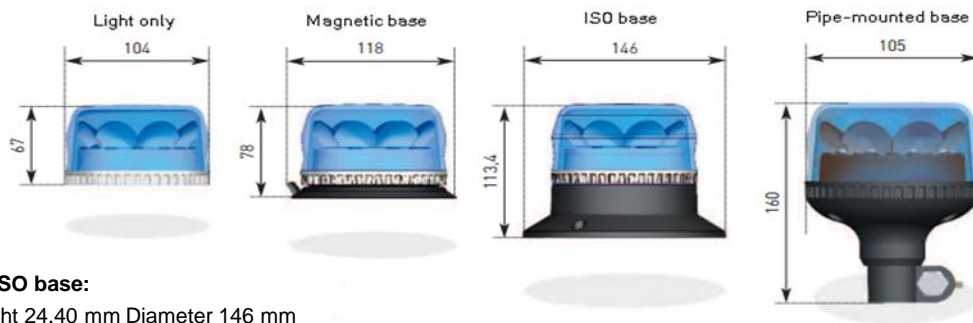

XS ISO base:

Height 24.40 mm Diameter 146 mm