




MERCURA

Standby Group




Emergency Light Arrow

15 lights

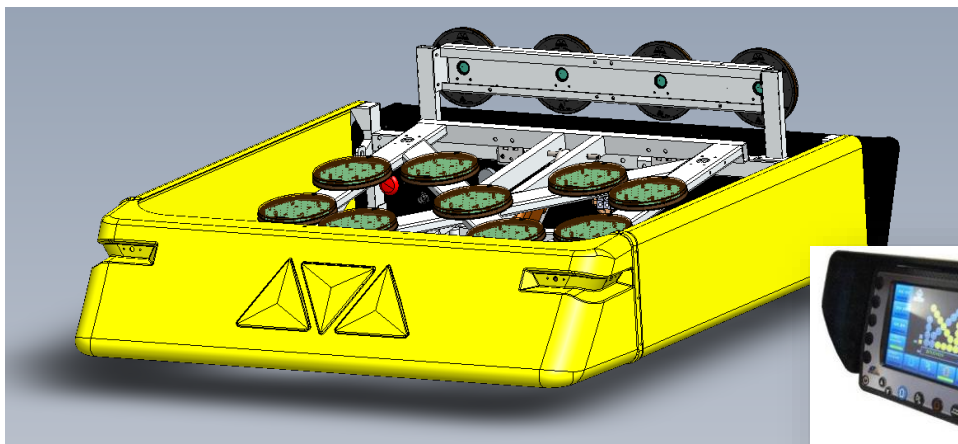

Advantages:

- Aluminium unit: light, strong, corrosion-resistant and recyclable
- Compact sized unit
- Graphic screen control
- Light power and Mercura quality
- Safety, very low wind resistance
- Features: left and right arrow, cross and scrolling (with option KR41)

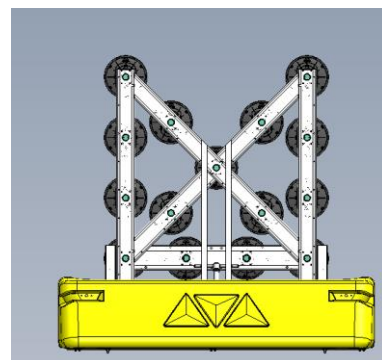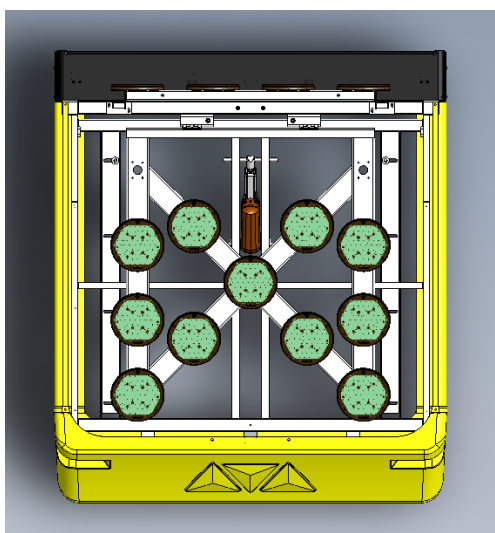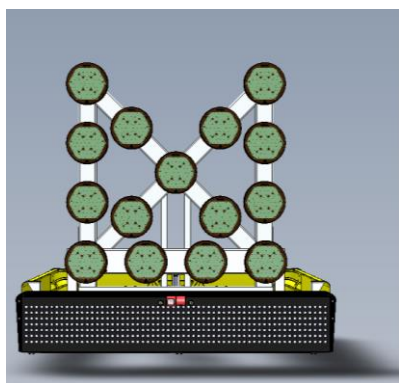

Emergency Light Arrow


15 lights

Technical specifications

- **Frame:**
 - All frames and protective casings are made of aluminium
 - The deflectors and casings of the units are painted with automotive paint. The following colours are available as standard: Amber (RAL 2000), White (RAL 9016), Yellow (RAL 1016), Fire brigade red (RAL 3000). Consult us for more colour options.
- **Arrow:**
 - Power supply 12 V or 24 V
 - 15 x 200 mm LED lights
 - 200 mm lights compliant with NF EN 12352
- Light specifications
 - *Light dimensions: 225 x 55 mm – Weight: 400 g*
 - *70 high intensity LEDs: amber C1 + C2*
 - *Certification: EN 12352 – compliant with the standard L8H – Class C1 – F2 – O1- M2*
 - *12 V model consumption: 0,6 A fixed and 0,3 A flashing*
 - *24 V model consumption: 0,23 A fixed and 0,11 A flashing*
 - *Light power in candelas: 2100 Cd (required minimum standard: 1500 Cd)*
- Operating temperature: -40°C to +85°C
- Raised by an electric jack
- Day/night adjustment of light intensity

Options

- KR41 pre-warning lightbar (4 x 200 mm LED lights) for scrolling (see pictures below)
- 200 mm Variable Message Panel – dimensions: 1558 x 294 x 200 mm
- Amber Gyroled Class 1 or Class 2, rotating or flashing – R65 approved

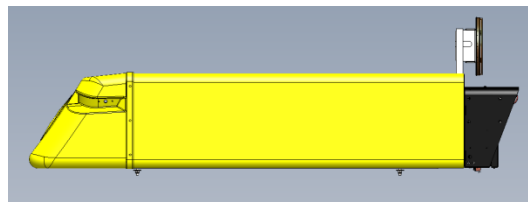

Product code: 30803-00