

M lightbar with Message Panel

Version for Airport



- Aerodynamic profile
- Unbreakable polycarbonate casing
- The lightbar's upper and lower parts are made from anti-corrosion anodised aluminium
- Amber corner flashing LED lights (compliant with OACI & EASA Type D*)

Technical specifications

- | | |
|--|---|
| <ul style="list-style-type: none"> • Dimensions (L x l x h) :
110 x 28 x 13.5 cm • Amber light at each end • Mode: flash • Central lights: Message Panel | <ul style="list-style-type: none"> • Loudspeaker: with Siren / Public Address option • Control : 12-key control panel • Roof connector: optional |
|--|---|

Name	Length	Code
M lightbar with Message Panel	1.10 m	32707
	1.50 m	32708




* Light meeting the specifications of Annex 14 (Convention on International Civil Aviation of ICAO regulations for vehicles and mobile obstacles like C) and the EASA (Annex to ED Decision 2014/013/R – Certification Specifications (CS) and Guidance Material (GM) for Aerodromes Design – CS-ADR-DSN)

M lightbar with Message Panel

Version for Airport

Options	Code
Roof Connector	32709
Siren / Public Address (requires option RC)	32710
Control by wires Interface (Control on +12V)	32712
Control by wires Interface (Control on ground)	32715
Stop light & interface to vehicle	32716
2 alley lights	29971

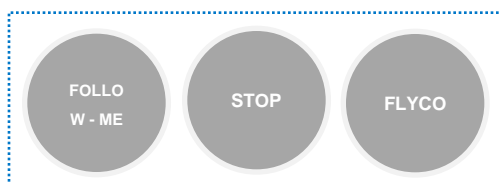

Standard Control Panel



Roof Connector option - 32709



Control Panel with Public Address function, supplied with option 32710