


The half-beacon L104 supports or replaces the main beacon on the front and / or rear of the vehicle.

Product features:

- 3 available variants
- Also for retrofitting to existing vehicles
- 2 or 4 modules per vehicle possible
- Can also be used in addition with a lightbar or integrated beacons
- Approval acc. ECE R65 "HTB 2"

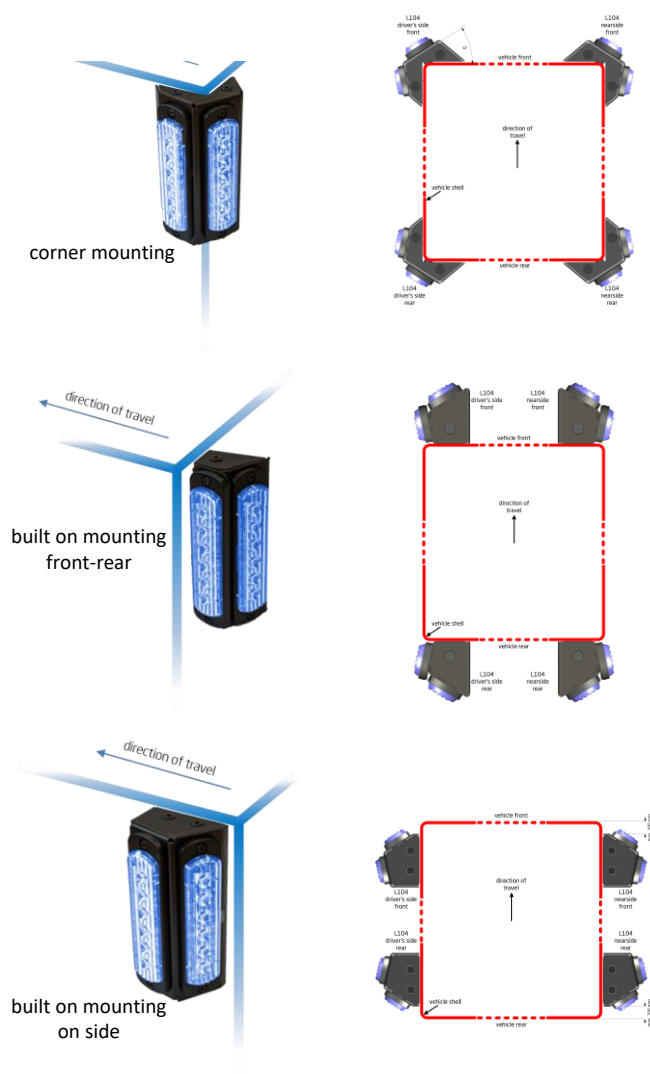


Designation	Code
L104 for corner mounting R65 Class 2	33426
L104 for built on mounting on side R65 Class 2	33427
L104 for built on mounting front-rear R65 Class 2	33428


TECHNICAL DATA

operating voltage:	12 / 24 VDC (10-30VDC)
current consumption	max. 2 A per module at 13,8 VDC max. 1 A per module at 27,6 VDC
LED-colour	blue
lens-colour	clear
number of LEDs	12
cable	2x 2 m
variants	• corner mounting • built on mounting front-rear • built on mounting on side
dimensions	• corner mounting 63,9 x 64,3 x 120,0 mm • built on front-rear 57,4 x 43,8 x 118,5 mm • built on on side 42,0 x 46,0 x 115,0 mm
temperature range	-40°C ... +85°C
weight	approx. 460g
approvals	light: E5*65R03/10*0077*00 EMC: E5*10R*05235

dimensions L104 – corner mounting

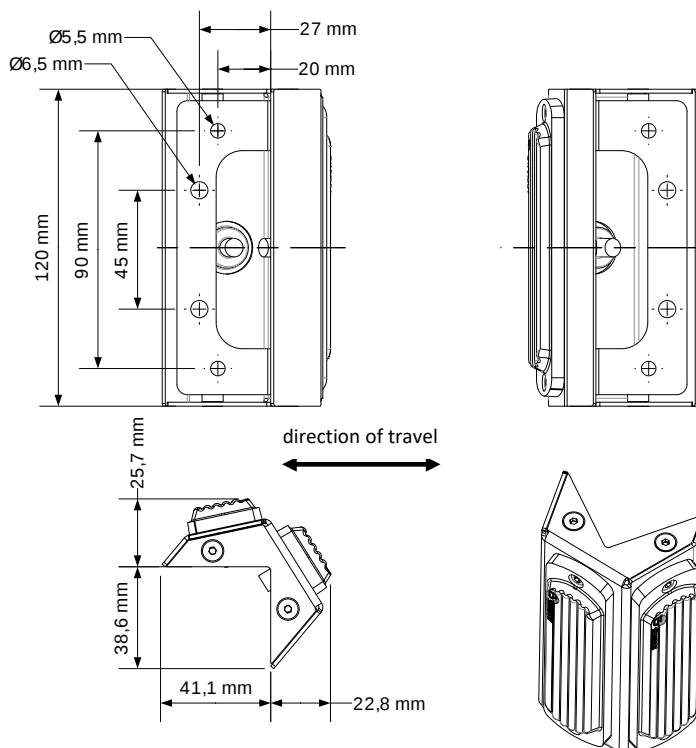

dimensions L104 – built on mounting front-rear

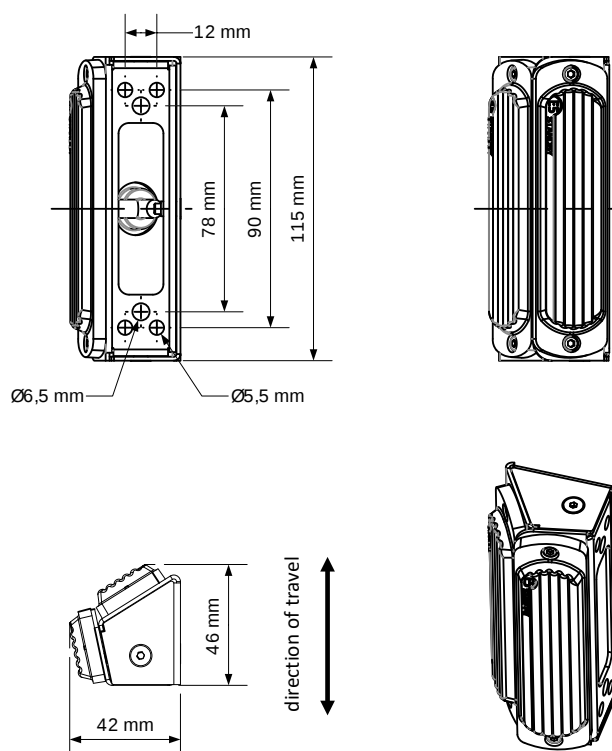

dimensions L104 – built on mounting on side

