

MS-350

For undercover application

The MS-350 mobile siren system is based on the latest digital switchgear technology and the consistent development of the proven MS-300.

Three independently configurable AF inputs (e.g. microphone, radio and line) leave nothing to be desired with voice announcements.

10 control inputs and 2 power outputs. Additional four input / output ports can be configured depending on the application. Thus, for universal use the controller.



Control panels



Lightbar or beacon



Voice announcements



Grill lights



MS-350

For undercover application

Technical specifications for MS-350

<ul style="list-style-type: none"> • Input voltage : 12V / 24V • Current consumption : in standby mode <500 µA, maximum 5 A (without beacon) • Temperature in operation : -25°C to +70°C • Output power <ul style="list-style-type: none"> • 12V : 2 x 50W (120W max) • 24V : 2 x 80W (200W max) • Protection class : IP54 • Approvals : <ul style="list-style-type: none"> • Acoustic W25050 • EMC E1 047152 	<ul style="list-style-type: none"> • Inputs : <ul style="list-style-type: none"> • 9 x <20 mA (programmable, high side) • 1 x <20 mA (programmable, low side) • Outputs : <ul style="list-style-type: none"> • 2 x <5A (programmable) • 1 x <2A (programmable, also usable as input) • Dimensions in mm (HxWxL) : 44,6x131x136,6 • Weight : approx. 400g
--	--

Technical specifications for K-SR 350

<ul style="list-style-type: none"> • Impedance : 4 Ohms (12V) / 16 Ohms (24V) • Power rating : 60W (80W peak) • Temperature in operation : -25°C to +60°C • Dimensions in mm : diameter 109,25x68 • Weight : approx. 850g • Protection class : IP54 • Color : black 	<ul style="list-style-type: none"> • Sound pressure level in 3,5m : <ul style="list-style-type: none"> • with 2x K-SR 350 121dB (A) • with 1 x K-SR 350 115 dB (A)
--	--

Available siren tones :

	Wail, Yelp, Hi-Lo, Horn
	Land, Stadt, US Yelp (DIN14610)
	Swiss tones (Annexe 11 sc 3 -ord 19/06/1995)
	Feuerwehr, Rettung, Polizei
	Ambulanza, Vigili del Fuoco
	UMH, Police, Gendarmerie, Sapeurs-Pompiers, ASA


Other tones are available (Finland, Sweden, Netherlands, Norway). Please consult us, more programmable options on request.

Code	Name
31601-00	Kit MS-350 (12V), with 1 x LS K-SR 350 - 4 Ohms and connections
31602-00	Kit MS-350 (24V), with 1 x LS K-SR 350 - 16 Ohms and connections
31603-00	Kit MS-350 (12V), with 2 x LS K-SR 350 - 4 Ohms and connections
31604-00	Kit MS-350 (12V), with 2 x LS K-SR 350 - 16 Ohms and connections

MS-350

For undercover application

Dimensions and mounting dimensions for MS-350 control unit :

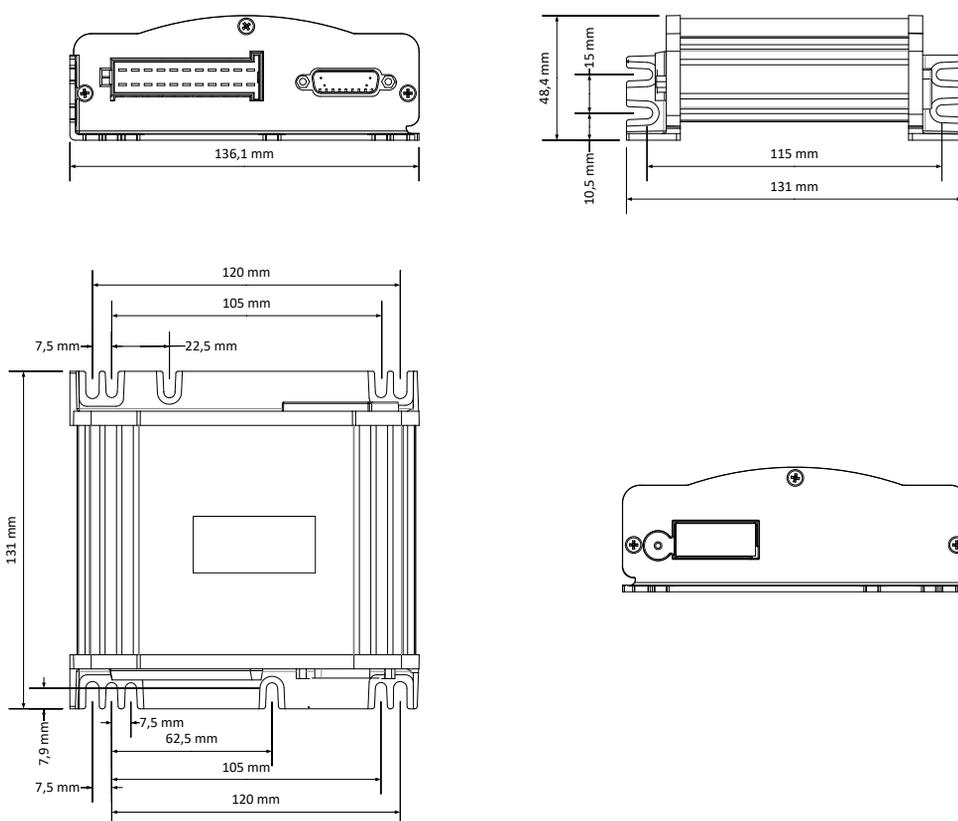

Dimensions and mounting dimensions for K-SR 350 loudspeaker :

